

Heating plates with thermal belt

Compact or with separate control unit

Compact or with separate control unit.

To meet the constraints linked with the environment of the production station. 2 versions are available: compact or with separate unit.

They are mainly designed for heating applications, preheating, repairing of CMS technology or traditional circuits, drying glues, etc.

- Quick temperature rise


- performance for re-welding with lead-free alloy
- high temperatures for some models

- low profile, maximum 65 mm

- height **adjustable top cover** (for lifting the PCB with respect to the heating plate, no need for additional tools, etc.)

- thermal safety

- **custom products** to the colours of your choice.

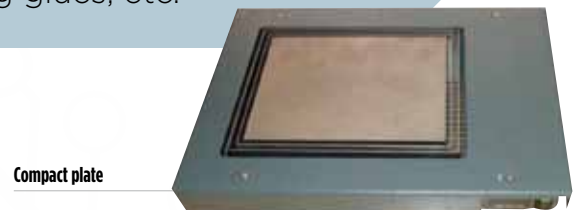

Compact plate



Separate box plate



Turning hotplate



Plate with PCB support

Technical characteristics of our standard hot plates

Model, C = compact	Dimensions of the plates (L*W) mm	Overall Dimensions (L*W*H) mm	Power/ Power supply	Regulation	Heating time	Maximal Temperature	Separate case
PC1	300 x 300	420 x 420 x 65	2700 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 400° / 30'	400°C	Yes
PC1C	300 x 300	480 x 420 x 55	2700 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 300° / 15'	300°C	No
PC2	200 x 150	320 x 270 x 65	1500 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 400° / 30'	400°C	Yes
PC2C	200 x 150	380 x 270 x 55	1500 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 300° / 15'	300°C	No
PC3	150 x 100	270 x 220 x 65	500 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 400° / 30'	400°C	Yes
PC3C	150 x 100	330 x 220 x 55	500 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 300° / 15'	300°C	No
PC 300x150	300 x 150	420 x 270 x 65	1500 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 400° / 30'	400°C	Yes
PC 300x150C	300 x 150	480 x 270 x 55	1500 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 300° / 15'	300°C	No
PC 300x200	300 x 200	420 x 320 x 65	2000 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 400° / 30'	400°C	Yes
PC 300x200C	300 x 200	480 x 320 x 55	2000 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 300° / 15'	300°C	No
PC 300x350	300 x 350	470 x 420 x 65	3000 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 400° / 30'	400°C	Yes
PC 300x350C	300 x 350	530 x 420 x 55	3000 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 300° / 15'	300°C	No
PCM 450	450 x 150	570 x 270 x 65	2200 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 400° / 30'	400°C	Yes
PCM 450C	450 x 150	630 x 270 x 55	2200 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 300° / 15'	300°C	No
PCM 500x400	500 x 400	620 x 520 x 65	3200 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 400° / 30'	400°C	Yes
PCM 500x400C	500 x 400	680 x 520 x 55	3200 W / 230 V 50/60 Hz	PID 1 or 2 displays	0 à 300° / 15'	300°C	No

FTM TECHNOLOGIES

78, rue Raymond Poincaré 92000 Nanterre
Tel : +33 (0)1 40 86 00 09 - Fax : +33 (0)1 40 86 16 45

info@ftm-technologies.com

www.ftm-technologies.com - www.semsoudage.com

SARL au capital de 64296 euros SIRET 429 408 164 NAF 4669C